


New

CE



## KIRAY 200 Infrared thermometer




Supplied with  
thermocouple K probe



### Distance from the target

Distance	150	300	900	mm
Diameter	5	10	30	mm

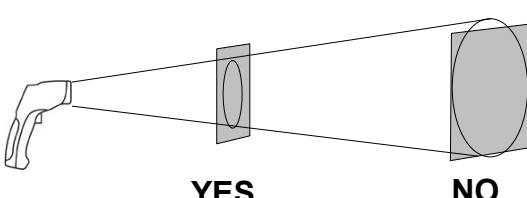

Make sure that the target is larger than the size of the laser sighting.

Infrared thermometer **KIRAY 200** is an infrared thermometer used to diagnose, inspect and check any temperature. Thanks to its elaborated optical system, it allows an easy and accurate measurement of little distant targets. **KIRAY 200** instrument has an internal memory which can save up to 20 measurements.

### Technical features

#### • Instrument features


Spectral response.....	8 -14 $\mu$ m
Optical.....	D.S : 30:1 (50 mm at 1500 mm)
Response time.....	Less than 1 second
Temperature range.....	From -50 to +850°C
Accuracy*	From -50 to -20°C : $\pm 5^\circ$ C From -20 to +200°C : $\pm 1.5\%$ of reading $\pm 2^\circ$ C From +200 to +538 °C : $\pm 2\%$ of reading $\pm 2^\circ$ C From +538 to +850°C : $\pm 3.5\%$ of reading $\pm 5^\circ$ C
Display resolution.....	0.1 °C
Emissivity.....	Adjustable from 0.10 to 1.00 (pre-set at 0.95)
Over range indication.....	Display indication : « -OL » for a negative over range, « OL » for a positive over range.
Laser sighting.....	Wavelength : 630-670 nm Output <1mW, Class 2 (II)
Positive or negative temperature indication.....	Automatic (no indication for a positive temperature) (-) sign for a negative temperature
Display.....	4 1/2 digits with LCD backlit display
Auto-extinction.....	Automatic after 7 seconds of inactivity
High/low alarm.....	Flashing signal on display and beep signal with adjustable thresholds
Power supply.....	Alkaline 9V battery
Autonomy.....	38 h (inactive laser and backlight) 15 h (active laser and backlight)
Use temperature.....	From 0 to +50°C
Storage temperature.....	From -20°C to +60°C
Relative humidity.....	From 10% to 90%RH in operating mode and >80%RH in storage
Dimensions.....	175 x 110 x 45 mm
Weight.....	230 g (included battery)
Memory.....	20 temperature values with unit of measurement (°C or °F)

\*Accuracy for an ambient temperature from 18 to 28°C (with a relative humidity lower than 80% RH)

#### • Thermocouple K probe features

Temperature range.....	From -40 to +400°C
Display range.....	From -50 to +1370°C
Resolution.....	0.1°C
Accuracy.....	$\pm 1.5\%$ of reading $\pm 3^\circ$ C
Cable length.....	1 m

## ■ Display

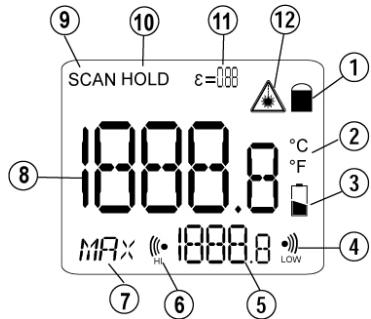

- 1 – Continuous measurement indicator
- 2 – Technical unit (°C / °F)
- 3 – Low battery indicator
- 4 – Low alarm symbol
- 5 – MAX, MIN, DIF (difference between MAX and MIN values), AVG (average), HAL (high alarm), LAL (low alarm), TK (TK temperature) and LOG (recorded value)
- 6 – High alarm symbol
- 7 – EMS, MAX, MIN, DIF, AVG, HAL, LAL, TK and LOG indicator
- 8 – Temperature value
- 9 – Current measurement indicator
- 10 – HOLD indicator (fixed measurement)
- 11 – Emissivity value
- 12 – Laser in operation indicator

## ■ KIRAY 200 buttons



- 1 – Up button. It allows to increment emissivity and high/low alarm thresholds and to move to the next recorded value.
- 2 – Set button. It allows to activate or deactivate laser and display backlight. It allows also to record a temperature.
- 3 – Mode button. It allows to navigate through the modes (emissivity, max value, min value, difference, average, high alarm, low alarm, TK value and recorded values).
- 4 – Down button. It allows to decrement emissivity and high/low alarm thresholds and to move to the previous recorded value.

## Infrared thermometer, how it work ?

Infrared thermometers can measure the surface temperature of an object. Its optic lens catches the energy emitted and reflected by the object. This energy is collected and focused onto a detector. This information is displayed as temperature. The laser pointer is only used to aim at the target.

## ■ Description



## ■ Supplied with

- Case with passer-by belt
- User manual
- K thermocouple probe

## ■ CE Certification



This device meets with following standards' requirements.

- EN 50081-1 : 1992, Electromagnetic compatibility, Part 1
- EN 50082-1 : 1992, Electromagnetic compatibility, Part 2

